




IDEA

/BLOOM 36° 02.AA67.101_._

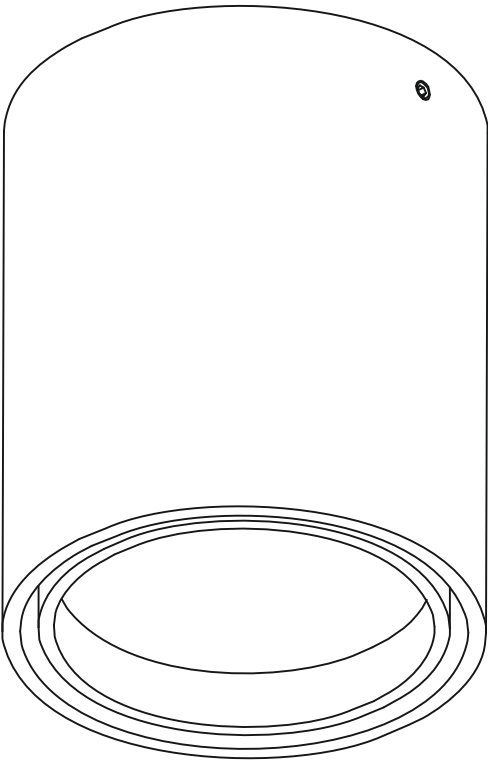

Light Output Ratio:	65.8%	
Luminaire Power:	8.95 W	
SHR Nominal:	0.50	Calculated using the TM5
SHR Maximum:	0.60	fine grid method.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Test Date:2020-08-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:7.954m [K=1.0000]
Remarks: 34°Reflector




LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: BLOOM 36° 2700K 02.AA67.101_._	TYPE:Down light	WEIGHT:
SPEC.:2700K CRI90 500MA	DIM.: $\varnothing 80 \times 85 \text{mm}$	SERIAL No.:
MFR.: IDEA ILUMINACIÓN S.A.	SUR.: $\varnothing 80 \text{mm}$	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 66.79 lm/W
MODEL	02.AA67.101_._	Imax (cd)	1577	S/MH (C0/180)	0.52	
NOMINAL POWER (W)	8.95	LOR (%)	65.8	S/MH (C90/270)	0.58	
RATED VOLTAGE (V)	17.9	TOTAL FLUX (lm)	597.75	η UP, DN (C0-180)	0.0, 32.3	
NOMINAL FLUX (lm)	908.757	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 33.4	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50	
TEST VOLTAGE (V)	17.9	η down (%)	65.8	CIBSE SHR MAX	0.60	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

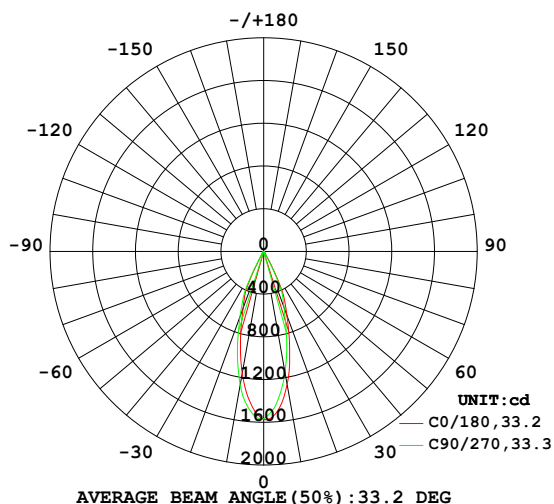

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

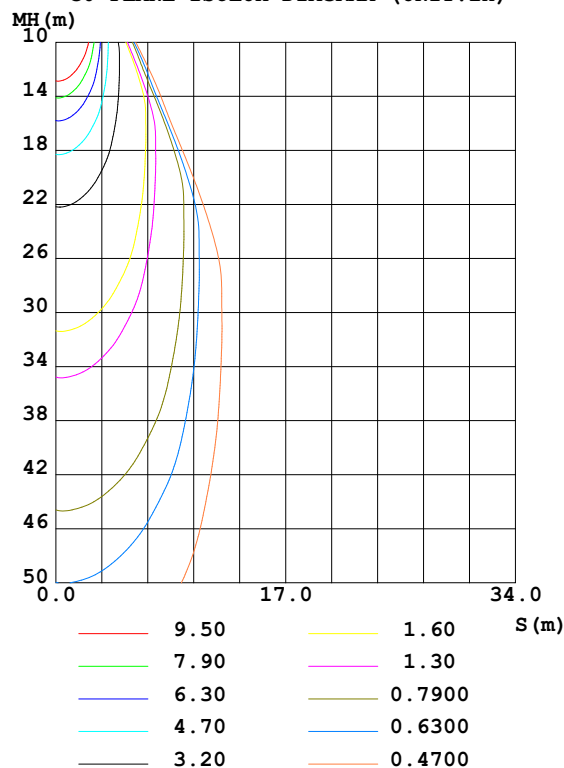

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Test Date: 2020-08-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 7.954m [K=1.0000]
Remarks: 34° Reflector



ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1265	1215	1151	1139	1158	1183	1268	1300	0- 10	131.3	131.3	22,14.4
20	639.4	599.6	557.5	554.6	567.8	587.7	649.5	669.4	10- 20	244.4	375.7	62.8,41.3
30	99.23	69.26	60.47	59.96	61.40	64.63	78.62	93.64	20- 30	158.2	533.8	89.3,58.7
40	22.29	22.76	22.52	22.71	22.62	22.29	22.70	22.49	30- 40	22.35	556.2	93,61.2
50	12.38	12.65	12.98	13.49	13.49	12.96	12.67	12.51	40- 50	12.74	568.9	95.2,62.6
60	9.536	9.699	10.00	10.36	10.34	9.935	9.690	9.543	50- 60	10.08	579.0	96.9,63.7
70	7.466	7.617	7.894	8.167	8.154	7.808	7.604	7.473	60- 70	8.719	587.7	98.3,64.7
80	5.064	5.296	5.451	5.936	5.730	5.340	5.258	5.539	70- 80	7.108	594.8	99.5,65.5
90	0	0	0	0	0	0	0	0	80- 90	2.925	597.7	100,65.8
100	0	0	0	0	0	0	0	0	90-100	0	597.7	100,65.8
110	0	0	0	0	0	0	0	0	100-110	0	597.7	100,65.8
120	0	0	0	0	0	0	0	0	110-120	0	597.7	100,65.8
130	0	0	0	0	0	0	0	0	120-130	0	597.7	100,65.8
140	0	0	0	0	0	0	0	0	130-140	0	597.7	100,65.8
150	0	0	0	0	0	0	0	0	140-150	0	597.7	100,65.8
160	0	0	0	0	0	0	0	0	150-160	0	597.7	100,65.8
170	0	0	0	0	0	0	0	0	160-170	0	597.7	100,65.8
180	0	0	0	0	0	0	0	0	170-180	0	597.7	100,65.8
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 563.18 lm

%lum = 94.2%

%lamp = 62.0%

Conical surface Flux(120deg): 579 lm

%lum = 96.9%

%lamp = 63.7%


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Test Date:2020-08-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:7.954m [K=1.0000]
Remarks: 34°Reflector



LUMINANCE LIMITATION CURVES

NAME: BLOOM 36° 2700K 02.AA67.101_._	TYPE:Down light	WEIGHT:
SPEC.:2700K CRI90 500MA	DIM.: $\varnothing 80 \times 85 \text{mm}$	SERIAL No.:
MFR.: IDEA ILUMINACIÓN S.A.	SUR.: $\varnothing 80 \text{mm}$	Shielding Angle:

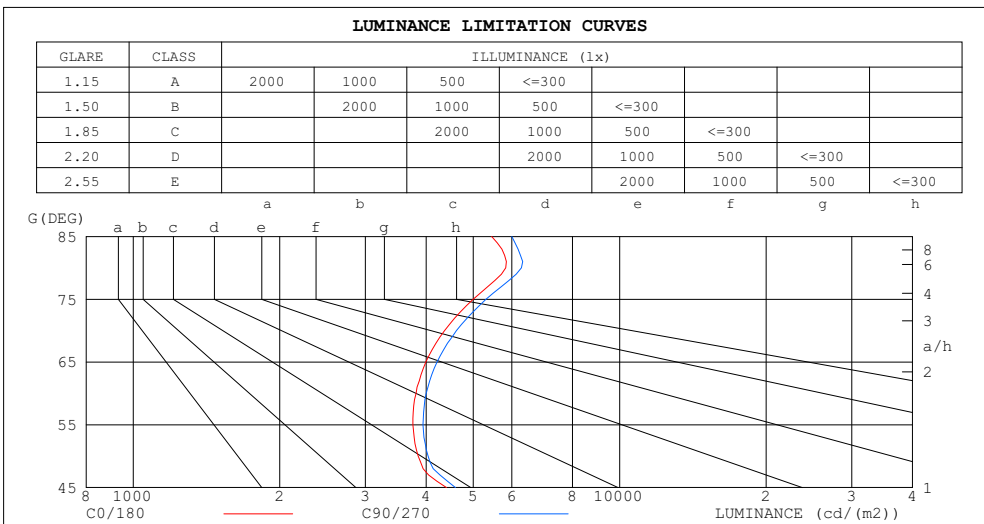

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	5457	5999
80	5833	6279
75	5001	5313
70	4366	4616
65	3996	4212
60	3814	4000
55	3759	3942
50	3851	4038
45	4405	4596

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Test Date:2020-08-12


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:7.954m [K=1.0000]
 Remarks: 34°Reflector



CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: BLOOM 36° 2700K 02.AA67.101_._	TYPE:Down light	WEIGHT:
SPEC.:2700K CRI90 500MA	DIM.: $\varnothing 80 \times 85 \text{mm}$	SERIAL No.:
MFR.: IDEA ILUMINACIÓN S.A.	SUR.: $\varnothing 80 \text{mm}$	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0														
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
ρ_{fc}	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Coefficients of Utilization(CU)														
0.0	.78	.78	.78	.76	.76	.76	.73	.73	.73	.70	.70	.70	.67	.67	.67	.66														
1.0	.73	.72	.70	.72	.70	.69	.69	.68	.67	.67	.66	.65	.64	.64	.63	.62														
2.0	.69	.66	.64	.68	.66	.64	.66	.64	.62	.64	.62	.61	.62	.61	.60	.59														
3.0	.65	.62	.60	.64	.62	.59	.62	.60	.58	.61	.59	.58	.59	.58	.57	.56														
4.0	.62	.59	.56	.61	.58	.56	.60	.57	.55	.58	.56	.55	.57	.55	.54	.53														
5.0	.59	.56	.53	.58	.55	.53	.57	.54	.52	.56	.54	.52	.55	.53	.52	.51														
6.0	.56	.53	.50	.56	.53	.50	.55	.52	.50	.54	.52	.50	.53	.51	.49	.49														
7.0	.54	.51	.48	.53	.50	.48	.53	.50	.48	.52	.49	.48	.51	.49	.47	.47														
8.0	.52	.48	.46	.51	.48	.46	.51	.48	.46	.50	.48	.46	.49	.47	.45	.45														
9.0	.50	.46	.44	.49	.46	.44	.49	.46	.44	.48	.46	.44	.48	.45	.44	.43														
10.0	.48	.45	.43	.48	.45	.42	.47	.44	.42	.47	.44	.42	.46	.44	.42	.41														

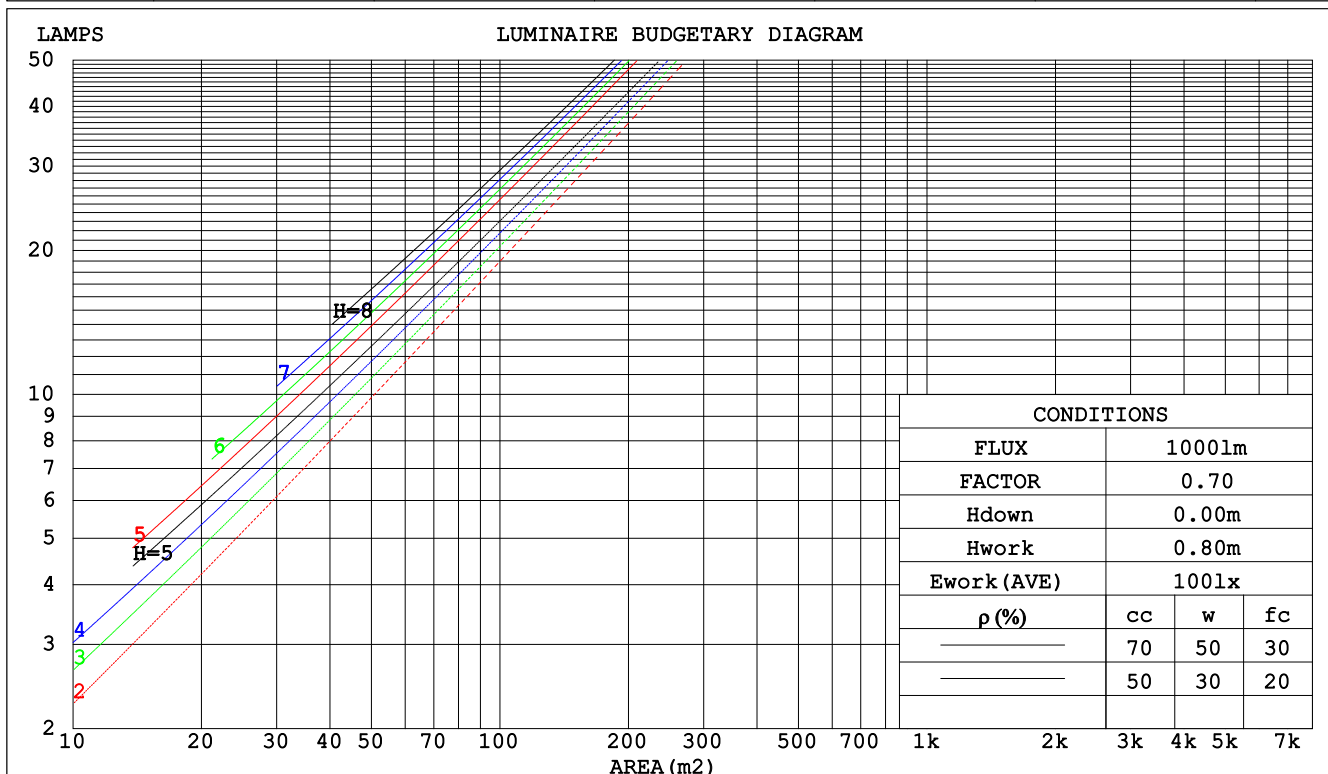

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Test Date: 2020-08-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 7.954m [K=1.0000]
 Remarks: 34° Reflector



WEC AND CCEC

NAME: BLOOM 36° 2700K 02.AA67.101_._	TYPE:Down light	WEIGHT:
SPEC.:2700K CRI90 500MA	DIM.: $\varnothing 80 \times 85 \text{mm}$	SERIAL No.:
MFR.: IDEA ILUMINACIÓN S.A.	SUR.: $\varnothing 80 \text{mm}$	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.111	.063	.020	.106	.061	.019	.098	.056	.018	.090	.052	.017	.083	.048	.016		
2.0	.102	.056	.017	.099	.054	.017	.092	.051	.016	.085	.048	.015	.080	.045	.014		
3.0	.095	.051	.015	.092	.049	.015	.086	.047	.014	.081	.044	.014	.076	.042	.013		
4.0	.089	.046	.014	.086	.045	.013	.081	.043	.013	.077	.041	.012	.073	.039	.012		
5.0	.084	.043	.012	.081	.042	.012	.077	.040	.012	.073	.039	.011	.070	.037	.011		
6.0	.079	.040	.011	.077	.039	.011	.073	.038	.011	.070	.036	.011	.067	.035	.010		
7.0	.075	.037	.011	.073	.037	.010	.070	.035	.010	.067	.034	.010	.064	.033	.010		
8.0	.071	.035	.010	.070	.034	.010	.067	.033	.010	.064	.033	.009	.062	.032	.009		
9.0	.068	.033	.009	.067	.033	.009	.064	.032	.009	.062	.031	.009	.060	.030	.009		
10.0	.065	.031	.009	.064	.031	.009	.062	.030	.009	.060	.030	.008	.058	.029	.008		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.125	.125	.125	.107	.107	.107	.073	.073	.073	.042	.042	.042	.013	.013	.013	
1.0	.112	.104	.096	.096	.089	.082	.066	.061	.057	.038	.035	.033	.012	.011	.011	
2.0	.101	.087	.075	.087	.075	.065	.059	.052	.045	.034	.030	.027	.011	.010	.009	
3.0	.092	.075	.061	.079	.064	.052	.054	.045	.037	.031	.026	.022	.010	.008	.007	
4.0	.085	.065	.050	.073	.056	.043	.050	.039	.030	.029	.023	.018	.009	.007	.006	
5.0	.078	.057	.041	.067	.049	.036	.046	.034	.025	.027	.020	.015	.009	.007	.005	
6.0	.073	.051	.035	.063	.044	.030	.043	.031	.021	.025	.018	.013	.008	.006	.004	
7.0	.068	.045	.029	.059	.039	.026	.040	.028	.018	.023	.016	.011	.008	.005	.004	
8.0	.064	.041	.025	.055	.036	.022	.038	.025	.016	.022	.015	.009	.007	.005	.003	
9.0	.060	.037	.022	.052	.033	.019	.036	.023	.014	.021	.013	.008	.007	.004	.003	
10.0	.057	.034	.019	.049	.030	.017	.034	.021	.012	.020	.012	.007	.006	.004	.002	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Test Date:2020-08-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:7.954m [K=1.0000]
 Remarks: 34°Reflector



UGR(Unified Glare Rating) Table

NAME: BLOOM 36° 2700K 02.AA67.101_._	TYPE:Down light	WEIGHT:
SPEC.:2700K CRI90 500MA	DIM.: φ80*85mm	SERIAL No.:
MFR.: IDEA ILUMINACIÓN S.A.	SUR.:φ80mm	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	10.8	11.6	11.0	11.7	11.9	10.9	11.7	11.1	11.9	12.0
3H	12.7	13.4	12.9	13.6	13.8	12.9	13.6	13.1	13.8	14.0
4H	13.7	14.4	14.0	14.7	14.9	14.0	14.7	14.2	14.9	15.1
6H	14.8	15.5	15.1	15.7	16.0	15.1	15.8	15.4	16.0	16.3
8H	15.2	15.9	15.5	16.1	16.4	15.6	16.2	15.9	16.5	16.7
12H	15.5	16.2	15.8	16.4	16.7	15.9	16.5	16.2	16.8	17.0
4H 2H	11.5	12.2	11.7	12.4	12.6	11.6	12.3	11.9	12.5	12.7
3H	13.6	14.3	14.0	14.5	14.8	13.8	14.4	14.1	14.7	15.0
4H	14.9	15.5	15.2	15.8	16.1	15.1	15.7	15.5	16.0	16.3
6H	16.2	16.7	16.5	17.0	17.4	16.4	16.9	16.8	17.3	17.6
8H	16.7	17.1	17.1	17.5	17.9	17.0	17.4	17.3	17.8	18.1
12H	17.0	17.4	17.4	17.8	18.2	17.3	17.7	17.7	18.1	18.5
8H 4H	15.4	15.9	15.8	16.3	16.6	15.6	16.1	16.0	16.4	16.8
6H	16.9	17.3	17.3	17.7	18.1	17.1	17.5	17.6	17.9	18.3
8H	17.5	17.9	18.0	18.3	18.7	17.8	18.1	18.2	18.5	19.0
12H	18.0	18.3	18.4	18.7	19.2	18.2	18.5	18.7	19.0	19.4
12H 4H	15.5	16.0	15.9	16.3	16.7	15.7	16.1	16.1	16.5	16.9
6H	17.1	17.4	17.5	17.8	18.3	17.3	17.6	17.7	18.1	18.5
8H	17.7	18.0	18.2	18.5	18.9	18.0	18.3	18.4	18.7	19.2
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.1 / - 0.1					+ 0.1 / - 0.1				
2.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.1				

CIE Pub.117, 908.8 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.3)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Test Date:2020-08-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:7.954m [K=1.0000]
Remarks: 34°Reflector



UTILIZATION FACTORS TABLE

NAME: BLOOM 36° 2700K 02.AA67.101_._	TYPE:Down light	WEIGHT:
SPEC.:2700K CRI90 500MA	DIM.: $\phi 80 \times 85 \text{mm}$	SERIAL No.:
MFR.: IDEA ILUMINACIÓN S.A.	SUR.: $\phi 80 \text{mm}$	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	57	53	51	57	53	51	57	53	51	48
0.80	62	58	56	62	58	56	61	58	56	53
1.00	65	61	59	64	61	59	63	61	58	56
1.25	67	64	62	67	64	61	66	63	61	58
1.50	69	66	64	68	66	63	67	65	63	60
2.00	71	68	66	70	67	65	68	66	64	61
2.50	72	70	68	71	69	67	69	67	66	62
3.00	73	71	69	72	70	68	70	68	67	63
4.00	75	73	71	73	72	70	71	70	69	64
5.00	75	74	73	74	73	72	71	70	70	65
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004				Suspended				SHRNOM = 1.25		


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Test Date:2020-08-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:7.954m [K=1.0000]
 Remarks: 34°Reflector



ISOCANDELA DIAGRAM

NAME: BLOOM 36° 2700K 02.AA67.101_._	TYPE:Down light	WEIGHT:
SPEC.:2700K CRI90 500MA	DIM.: $\varnothing 80 \times 85 \text{mm}$	SERIAL No.:
MFR.: IDEA ILUMINACIÓN S.A.	SUR.: $\varnothing 80 \text{mm}$	Shielding Angle:

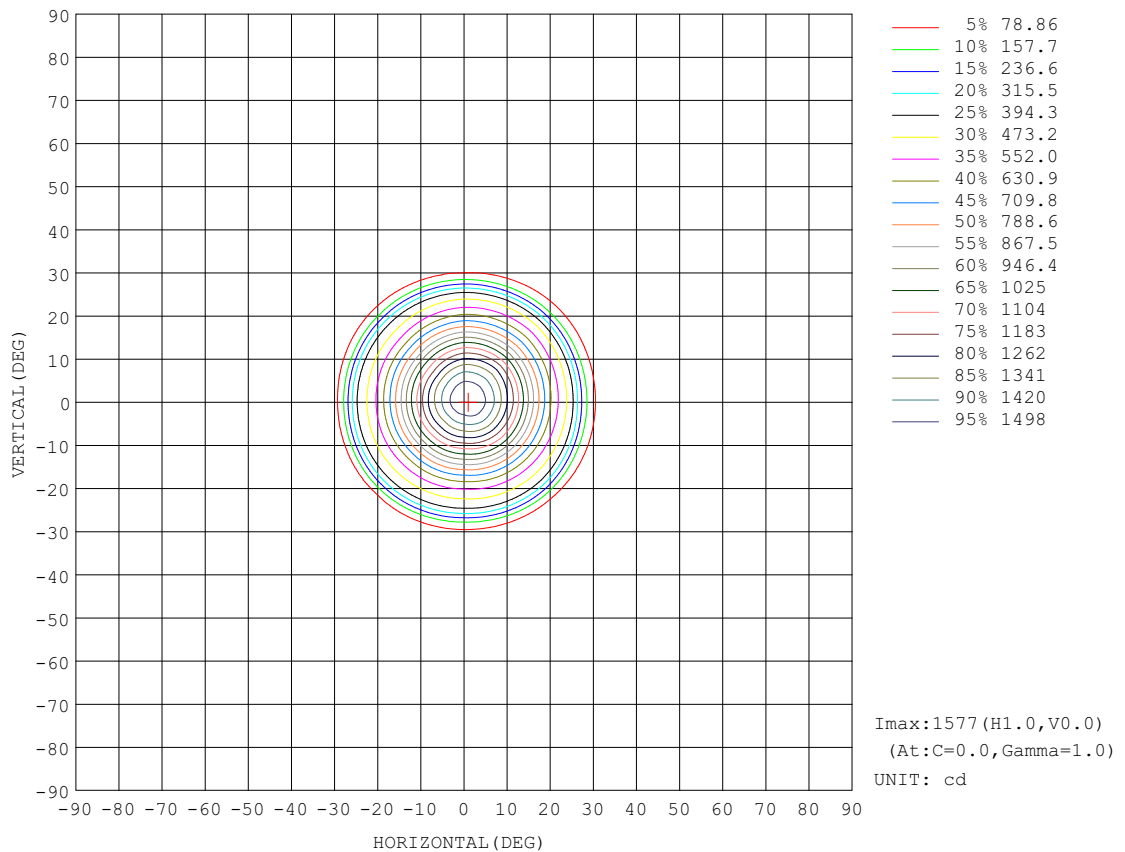


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Test Date:2020-08-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:7.954m [K=1.0000]
Remarks: 34°Reflector



AAI Figure

NAME: BLOOM 36° 2700K 02.AA67.101_._	TYPE:Down light	WEIGHT:
SPEC.:2700K CRI90 500MA	DIM.: $\varnothing 80 \times 85 \text{mm}$	SERIAL No.:
MFR.: IDEA ILUMINACIÓN S.A.	SUR.: $\varnothing 80 \text{mm}$	Shielding Angle:

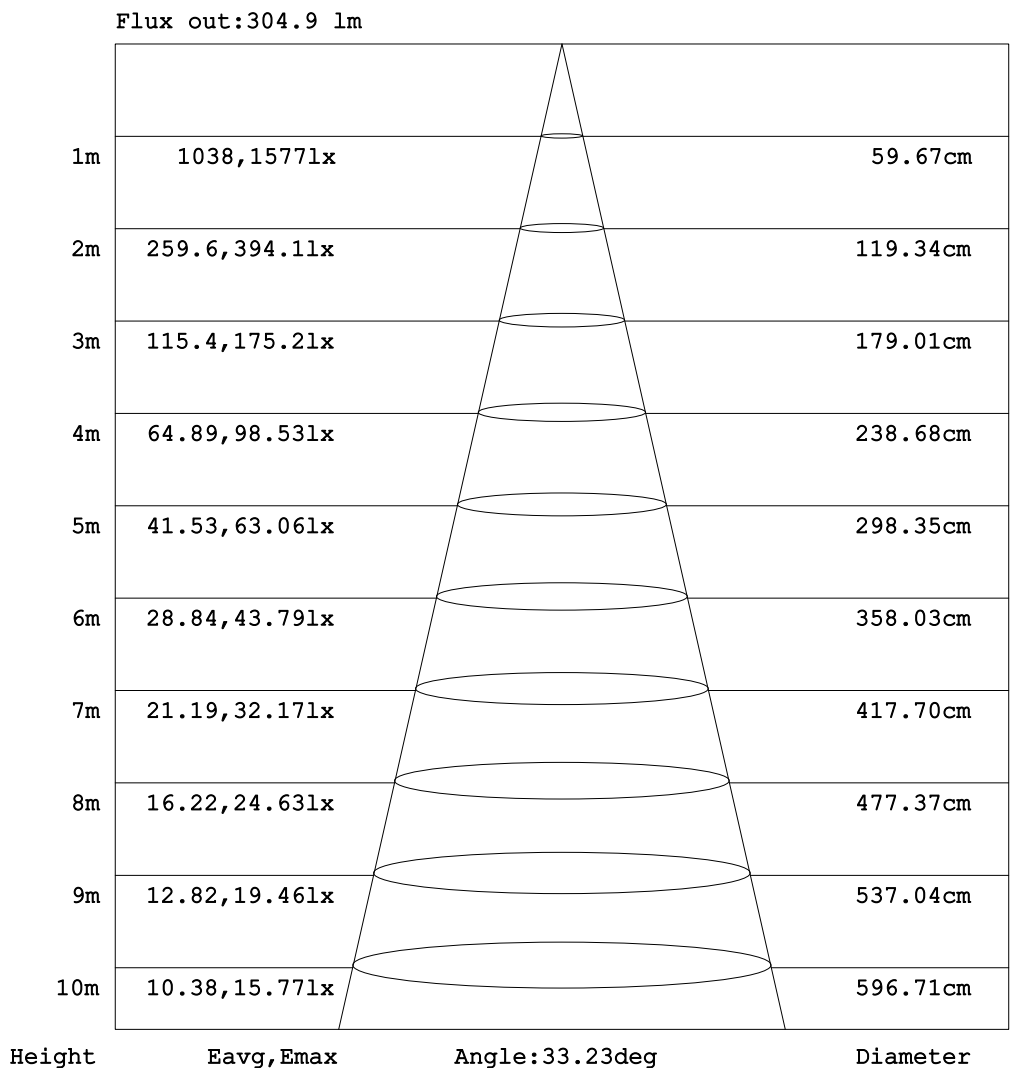

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Test Date:2020-08-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:7.954m [K=1.0000]
 Remarks: 34° Reflector



ISOLUX DIAGRAM

NAME: BLOOM 36° 2700K 02.AA67.101_._	TYPE:Down light	WEIGHT:
SPEC.:2700K CRI90 500MA	DIM.: $\varnothing 80 \times 85 \text{mm}$	SERIAL No.:
MFR.: IDEA ILUMINACIÓN S.A.	SUR.: $\varnothing 80 \text{mm}$	Shielding Angle:

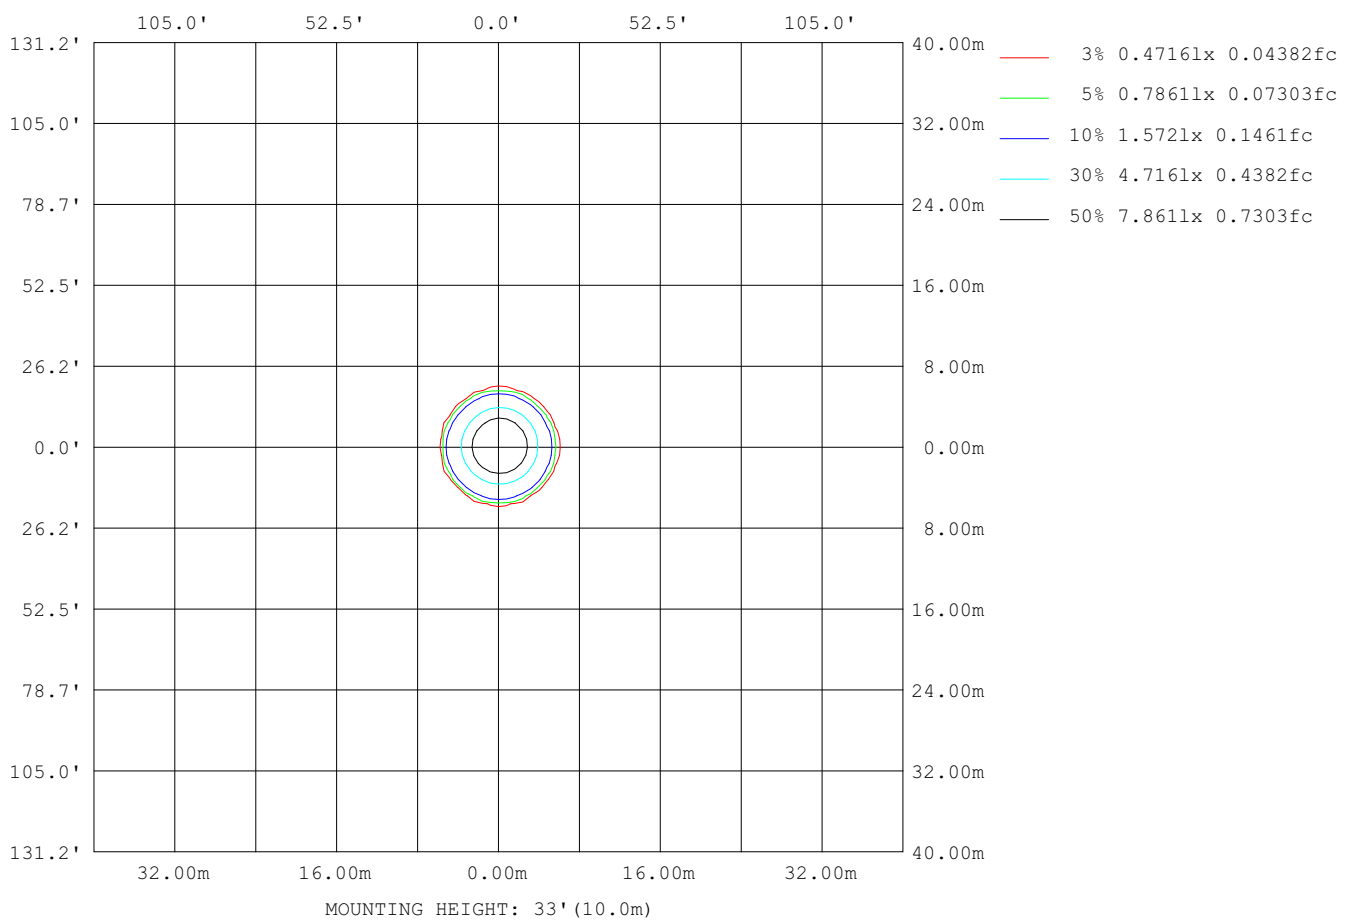

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Test Date:2020-08-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:7.954m [K=1.0000]
Remarks: 34°Reflector



LED Avg.L Report

NAME: BLOOM 36° 2700K 02.AA67.101_._	TYPE:Down light	WEIGHT:
SPEC.:2700K CRI90 500MA	DIM.: $\varnothing 80 \times 85 \text{mm}$	SERIAL No.:
MFR.: IDEA ILUMINACIÓN S.A.	SUR.: $\varnothing 80 \text{mm}$	Shielding Angle:

AvgL	cd/m2
L_0~180 (65) av	4174
L_0~180 (75) av	5255
L_0~180 (85) av	5945
L_90~270 (65) av	4140
L_90~270 (75) av	5206
L_90~270 (85) av	5918
L_45 (65) av	4153
L_45 (75) av	5239
L_45 (85) av	6299


Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Test Date:2020-08-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:7.954m [K=1.0000]
Remarks: 34°Reflector



Planar Illuminance Curve

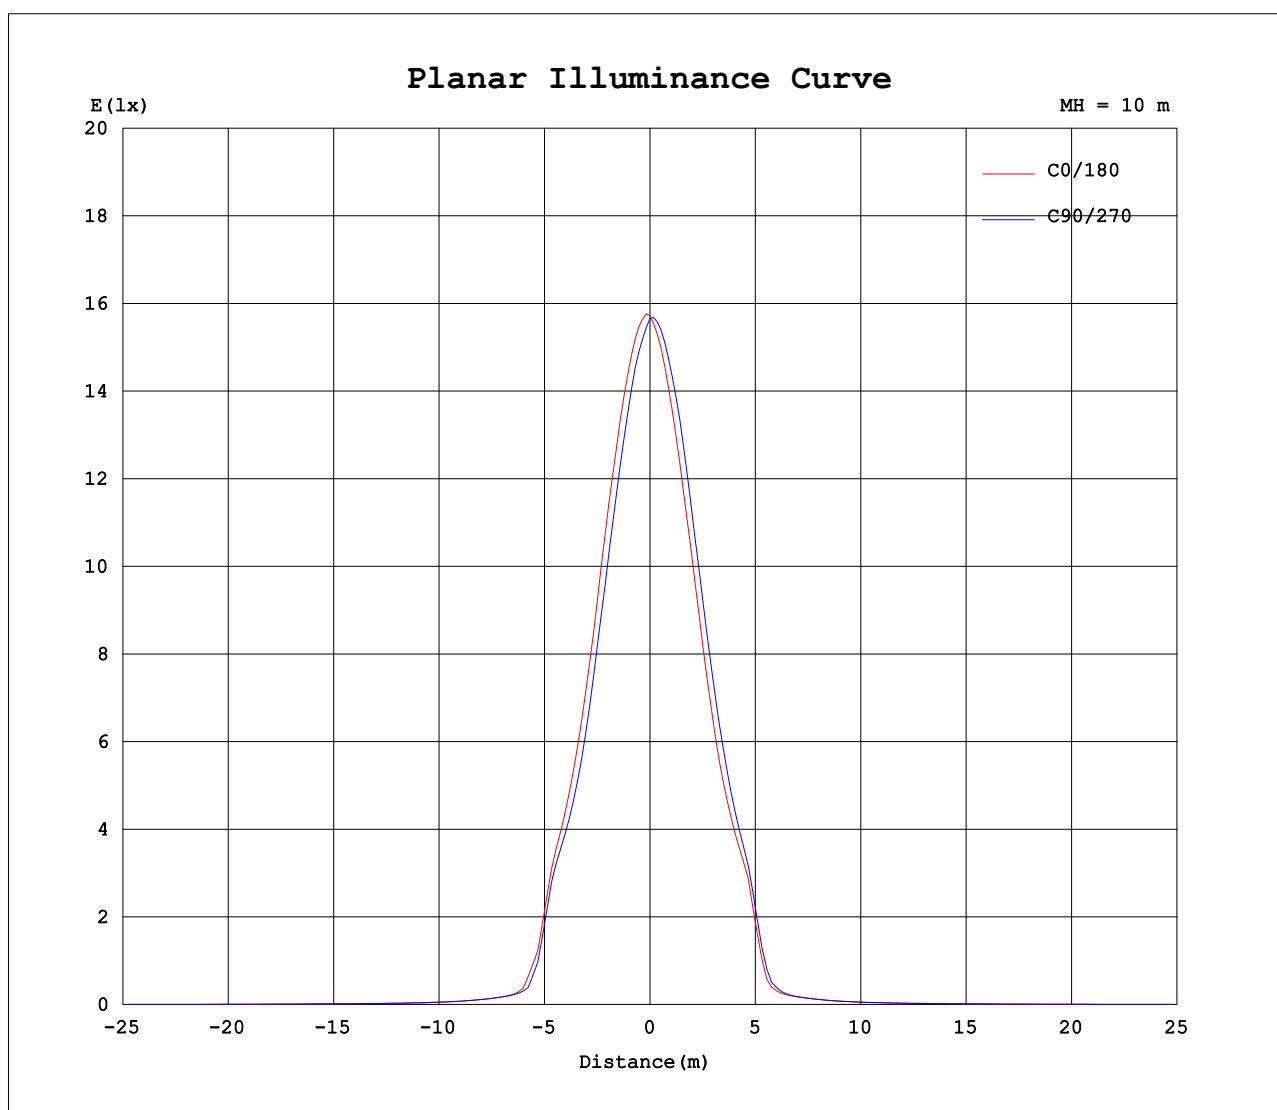

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Test Date: 2020-08-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 7.954m [K=1.0000]
 Remarks: 34° Reflector



LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: BLOOM 36° 2700K 02.AA67.101_._	TYPE:Down light	WEIGHT:
SPEC.:2700K CRI90 500MA	DIM.: $\varnothing 80 \times 85 \text{mm}$	SERIAL No.:
MFR.: IDEA ILUMINACIÓN S.A.	SUR.: $\varnothing 80 \text{mm}$	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1572	1568	1566	1566	1572	1568	1566	1566										
5	1499	1468	1420	1406	1425	1450	1493	1504										
10	1265	1215	1151	1139	1158	1183	1268	1300										
15	941	892	830	818	839	870	951	972										
20	639	600	557	555	568	588	650	669										
25	417	408	375	376	387	389	426	437										
30	99.2	69.3	60.5	60.0	61.4	64.6	78.6	93.6										
35	32.3	32.8	32.2	32.4	32.3	31.8	33.1	33.2										
40	22.3	22.8	22.5	22.7	22.6	22.3	22.7	22.5										
45	15.6	16.0	16.3	16.5	16.5	16.0	15.8	15.6										
50	12.4	12.7	13.0	13.5	13.5	13.0	12.7	12.5										
55	10.8	11.0	11.3	11.7	11.7	11.3	11.0	10.8										
60	9.54	9.70	10.0	10.4	10.3	9.93	9.69	9.54										
65	8.44	8.60	8.90	9.22	9.20	8.82	8.59	8.46										
70	7.47	7.62	7.89	8.17	8.15	7.81	7.60	7.47										
75	6.47	6.63	6.88	7.14	7.13	6.78	6.60	6.57										
80	5.06	5.30	5.45	5.94	5.73	5.34	5.26	5.54										
85	2.38	2.59	2.61	3.05	2.80	2.56	2.54	2.78										
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG

Test Date:2020-08-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:7.954m [K=1.0000]
Remarks: 34°Reflector