

IDEA

/CROLL COLGANTE (05.AA36.2011.__ / 05.AA36.2111.__ / 05.AA36.2211.__)



Light Output Ratio:	76.1%
Luminaire Power:	11.46 W

SHR Nominal:	0.00	Calculated using the TM5
SHR Maximum:	1.00	fine grid method.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Test Date: 2021-07-22


γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity: 65.0%
Test Distance: 10.000m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:230.10V I:0.0528A P:11.460W PF:0.9437 Freq:49.99Hz Lamp Flux:1279x1 lm		
NAME: CROLL COLGANTE	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:200697
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 84.92 lm/W
MODEL	CXB1512-30G-M4-NOU	I _{max} (cd)	5067	S/MH(C0/180)	0.35	
NOMINAL POWER(W)	11	LOR(%)	76.1	S/MH(C90/270)	0.37	
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	973.20	η _{UP,DN} (C0-180)	0.0,37.7	
NOMINAL FLUX(lm)	1279	CIE CLASS	DIRECT	η _{UP,DN} (C180-360)	0.0,38.4	
LAMPS INSIDE	1	η _{up} (%)	0.0	CIBSE SHR NOM	0.00	
TEST VOLTAGE(V)	230	η _{down} (%)	76.1	CIBSE SHR MAX	1.00	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

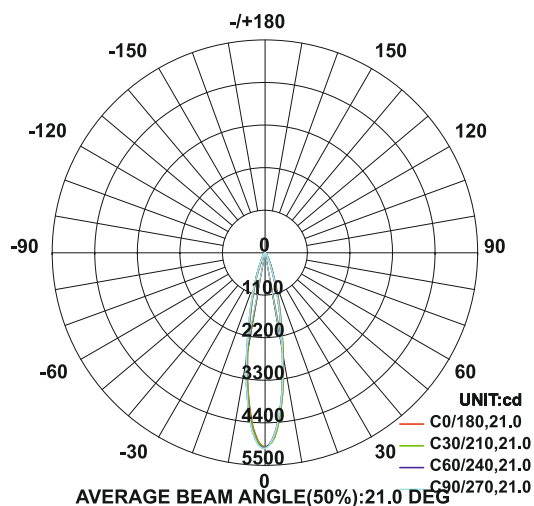

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

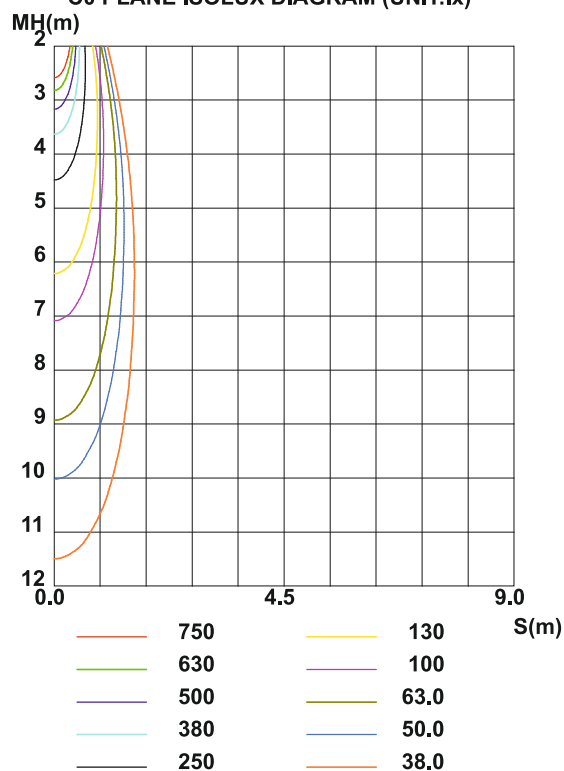


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Test Date:2021-07-22

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:10.000m [K=1.0000]
 Remarks:

/CROLL COLGANTE (05.AA36.2011.__ / 05.AA36.2111.__ / 05.AA36.2211.__)

LUMINANCE LIMITATION CURVES

Test:U:230.10V I:0.0528A P:11.460W PF:0.9437 Freq:49.99Hz Lamp Flux:1279x1 lm		
NAME: CROLL COLGANTE	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:200697
MFR.:	SUR.:	Shielding Angle:

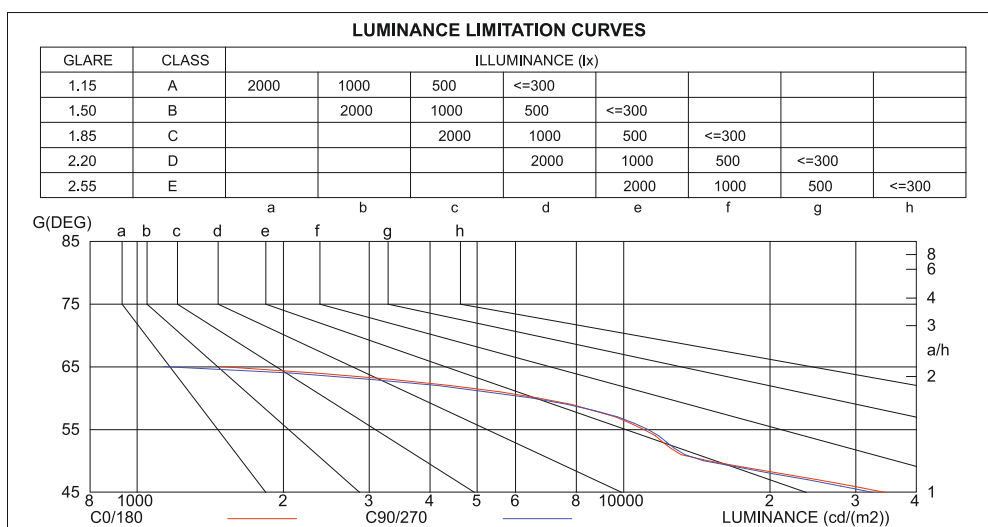

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	0	0
80	0	0
75	0	0
70	125	0
65	1487	1134
60	6665	6468
55	11000	11204
50	14907	14590
45	34458	32566

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Test Date:2021-07-22


γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

/CROLL COLGANTE (05.AA36.2011.__ / 05.AA36.2111.__ / 05.AA36.2211.__)

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.10V I:0.0528A P:11.460W PF:0.9437 Freq:49.99Hz Lamp Flux:1279x1 lm		
NAME: CROLL COLGANTE	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:200697
MFR.:	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	.91	.91	.91	.88	.88	.88	.85	.85	.85	.81	.81	.81	.78	.78	.78	.76
1.0	.86	.84	.83	.84	.83	.82	.81	.80	.79	.78	.78	.77	.76	.75	.75	.73
2.0	.82	.79	.77	.80	.78	.77	.78	.76	.75	.76	.75	.73	.74	.73	.72	.71
3.0	.78	.75	.73	.77	.75	.73	.75	.73	.71	.73	.72	.70	.72	.70	.69	.68
4.0	.75	.72	.70	.74	.71	.69	.73	.70	.68	.71	.69	.68	.70	.68	.67	.66
5.0	.72	.69	.67	.71	.68	.66	.70	.68	.66	.69	.67	.65	.68	.66	.65	.64
6.0	.70	.66	.64	.69	.66	.64	.68	.65	.63	.67	.65	.63	.66	.64	.63	.62
7.0	.67	.64	.62	.67	.64	.62	.66	.63	.61	.65	.63	.61	.64	.62	.61	.60
8.0	.65	.62	.60	.65	.62	.60	.64	.61	.59	.63	.61	.59	.63	.61	.59	.58
9.0	.63	.60	.58	.63	.60	.58	.62	.60	.58	.62	.59	.57	.61	.59	.57	.57
10.0	.61	.58	.56	.61	.58	.56	.61	.58	.56	.60	.58	.56	.60	.57	.56	.55

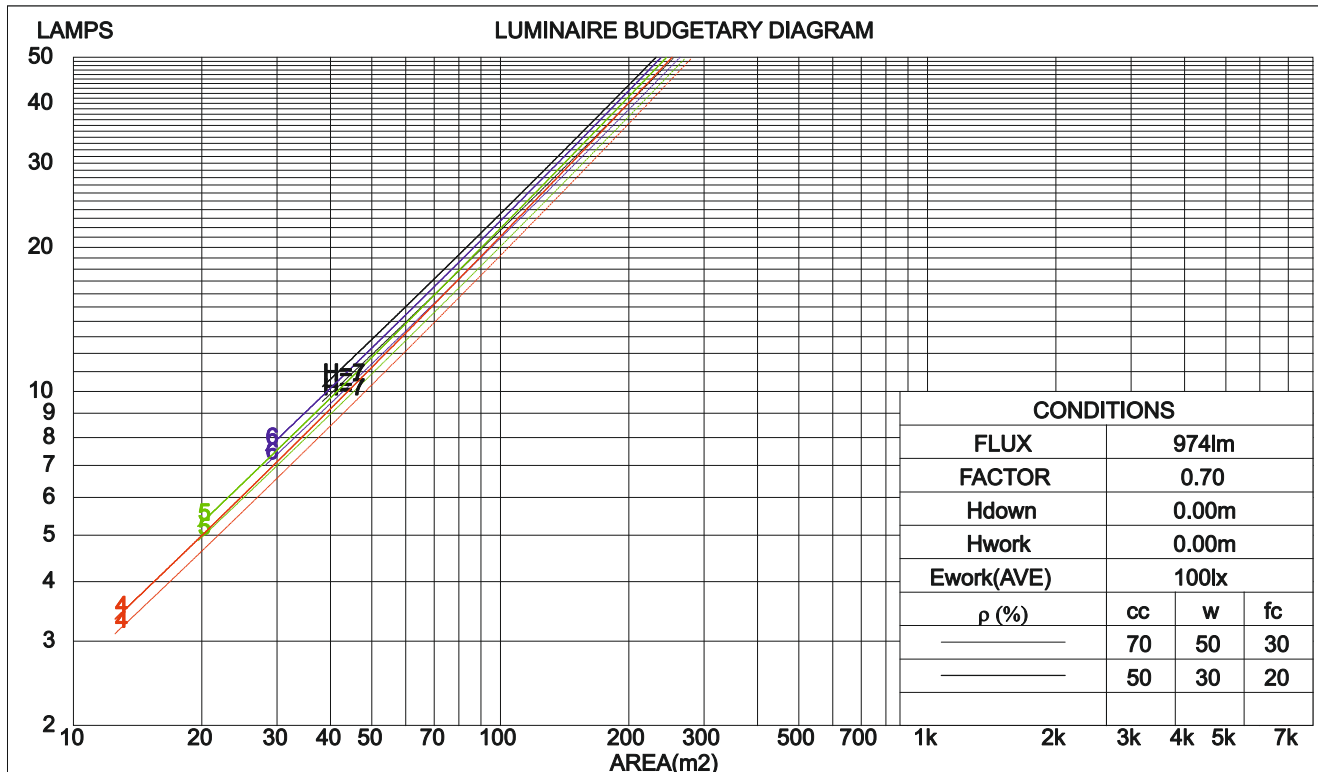

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Test Date:2021-07-22

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

/CROLL COLGANTE (05.AA36.2011.__ / 05.AA36.2111.__ / 05.AA36.2211.__)

UGR(Unified Glare Rating) Table

Test:U:230.10V I:0.0528A P:11.460W PF:0.9437 Freq:49.99Hz Lamp Flux:1279x1 lm											
NAME: CROLL COLGANTE					TYPE:LED			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:200697			
MFR.:					SUR.:			Shielding Angle:			
ceiling/cavity		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H	y = 2H	15.4	16.1	15.6	16.2	16.4	15.1	15.8	15.3	15.9	16.1
	3H	15.3	15.9	15.5	16.1	16.3	14.9	15.6	15.2	15.7	15.9
	4H	15.2	15.8	15.4	16.0	16.2	14.9	15.5	15.1	15.7	15.9
	6H	15.1	15.7	15.4	15.9	16.1	14.8	15.3	15.1	15.6	15.8
	8H	15.1	15.6	15.4	15.8	16.1	14.7	15.3	15.0	15.5	15.8
	12H	15.0	15.5	15.3	15.8	16.1	14.7	15.2	15.0	15.5	15.7
4H	2H	15.2	15.8	15.5	16.0	16.2	14.9	15.5	15.2	15.7	15.9
	3H	15.0	15.6	15.4	15.8	16.1	14.7	15.2	15.0	15.5	15.8
	4H	15.0	15.4	15.3	15.7	16.0	14.6	15.1	15.0	15.4	15.7
	6H	14.9	15.3	15.2	15.6	15.9	14.5	14.9	14.9	15.3	15.6
	8H	14.8	15.2	15.2	15.5	15.9	14.5	14.9	14.9	15.2	15.6
	12H	14.7	15.1	15.1	15.5	15.9	14.4	14.8	14.8	15.1	15.5
8H	4H	14.8	15.2	15.2	15.5	15.9	14.5	14.9	14.9	15.2	15.6
	6H	14.7	15.0	15.1	15.4	15.8	14.4	14.7	14.8	15.1	15.5
	8H	14.6	14.9	15.1	15.3	15.8	14.3	14.6	14.7	15.0	15.4
	12H	14.6	14.8	15.0	15.2	15.7	14.2	14.5	14.7	14.9	15.4
12H	4H	14.7	15.1	15.1	15.5	15.9	14.4	14.8	14.8	15.1	15.5
	6H	14.6	14.9	15.1	15.3	15.8	14.3	14.6	14.7	15.0	15.4
	8H	14.6	14.8	15.0	15.2	15.7	14.2	14.5	14.7	14.9	15.4
Variations with the observer position at spacings:											
S = 1.0H		+ 2.8 / - 8.4					+ 2.7 / - 8.0				
1.5H		+ 4.7 / - 6.1					+ 4.6 / - 5.7				
2.0H		+ 5.7 / - 9.6					+ 5.5 / -10.0				

CIE Pub.117, 1279 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.9)
Area: 0.001 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG


Test Date:2021-07-22

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

/CROLL COLGANTE (05.AA36.2011.__ / 05.AA36.2111.__ / 05.AA36.2211.__)

AAI Figure

Test:U:230.10V I:0.0528A P:11.460W PF:0.9437 Freq:49.99Hz Lamp Flux:1279x1 lm		
NAME: CROLL COLGANTE	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:200697
MFR.:	SUR.:	Shielding Angle:

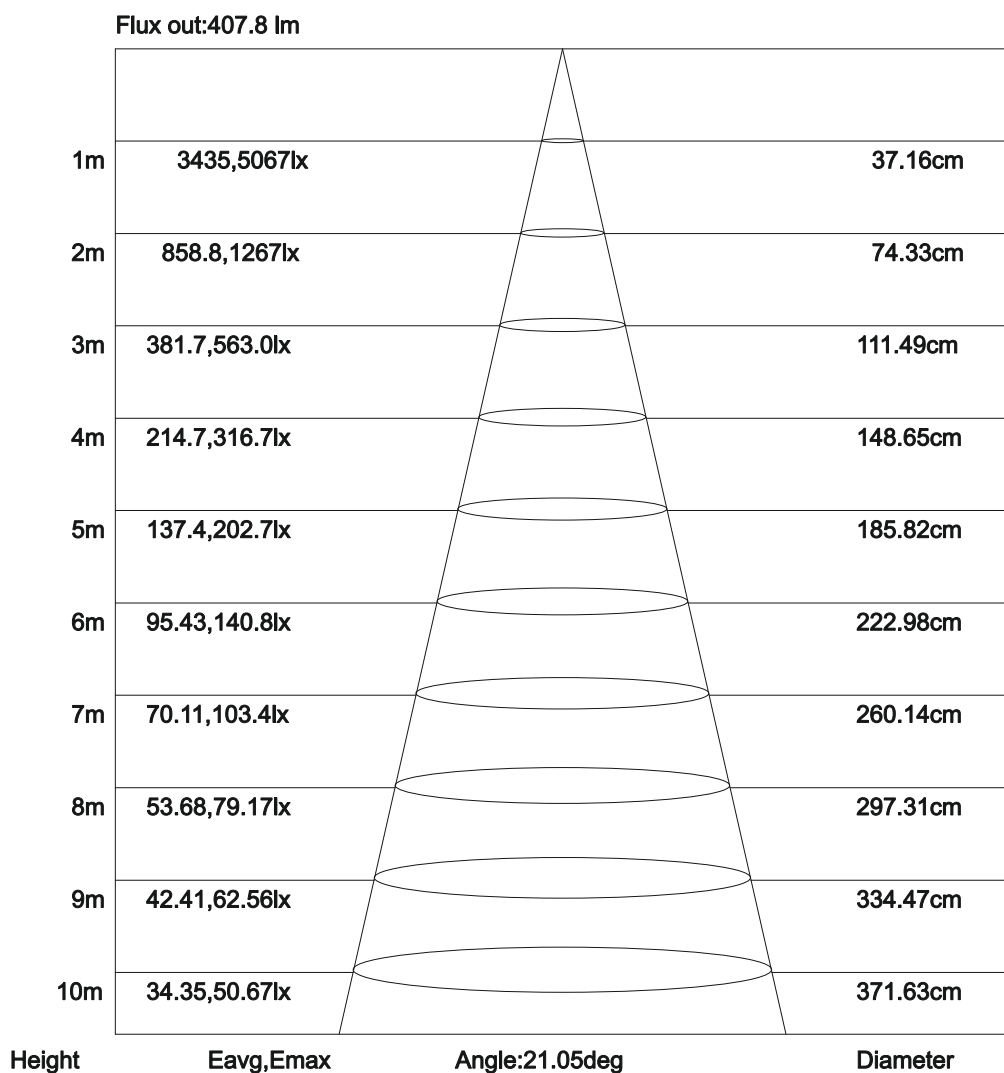

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Test Date:2021-07-22

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.10V I:0.0528A P:11.460W PF:0.9437 Freq:49.99Hz Lamp Flux:1279x1 lm		
NAME: CROLL COLGANTE	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:200697
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

[illegible]

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG

Test Date:2021-07-22

γRange: 0 - 90DEG
 γInterval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:10.000m [K=1.0000]
 Remarks: