





Indoor Luminaire Photometric Data

Description Information

Luminary Name: FLURI C RANURA REC 06.AA96.11_2.__	Lum. Catalog: Wall Light	Test ID:
Lamp Name:	Lamp Catalog: SMT	Test Date: 2021/07/09
Manufacture: IDEA ILUMINACIÓN S.A.	Shld. Ang(°):	Test Machine: GON-2000
Test Lab:	Frequency(Hz): 50	Lamp CCT(K): 3000 Ra: 90
Lum. Size (W*L*H): 0.000m*0.000m*0.000m	Lum. Area(m ²): 0.000	Lum. W(kg): 0.010
Test System: C, γ	Test Step: C=30.0 γ=1.0	Temp. (°C): 25
		Humidity(%): 50.0

Character Parameter

Lamp Speciality Parameter	Luminaire Speciality Parameter	
Rated Flux(lm): 1.000	Luminary Flux(lm): 6.227	Field Angle(10%Imax): 127.7(°)
Rated Power(W): 1	Luminary Efficiency: 622.70%	Down Lumens&Percent: 4.261lm 68.43%
Rated Voltage(V): 3	Luminary EER(lm/W): 4.552	Up Lumens&Percent: 1.966lm 31.57%
Tested Power(W): 1.368	Max. Candela(cd): 4.309	S/MH: C0_a180=1.596 C90_270=1.399
Lamps' Inside: 1	Max Cand@Ang. (°): C=330.0 γ=83.0	CIE Type: General Diffuse
Tested Electrics(V, A, pf): 221.3, 0.013, 0.474	Beam Angle(50%Imax): 22.8(°)	ErP Φuse(120°): 1.796lm
Lamp Size(W*L*H): 0.000m*0.000m*0.000m	Left=68.1°, Right=90.9°	IRF(%): 74.682

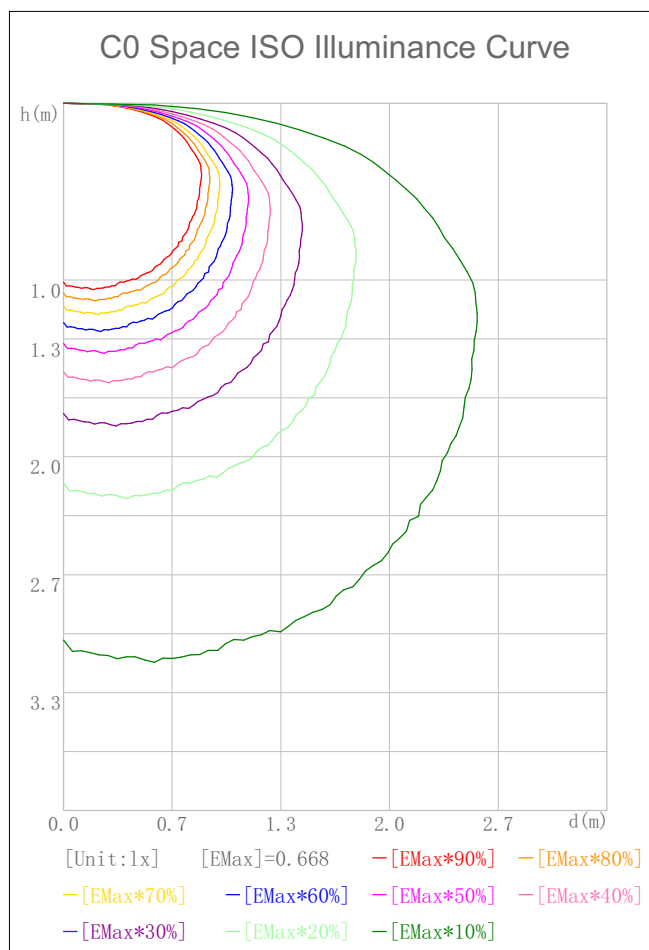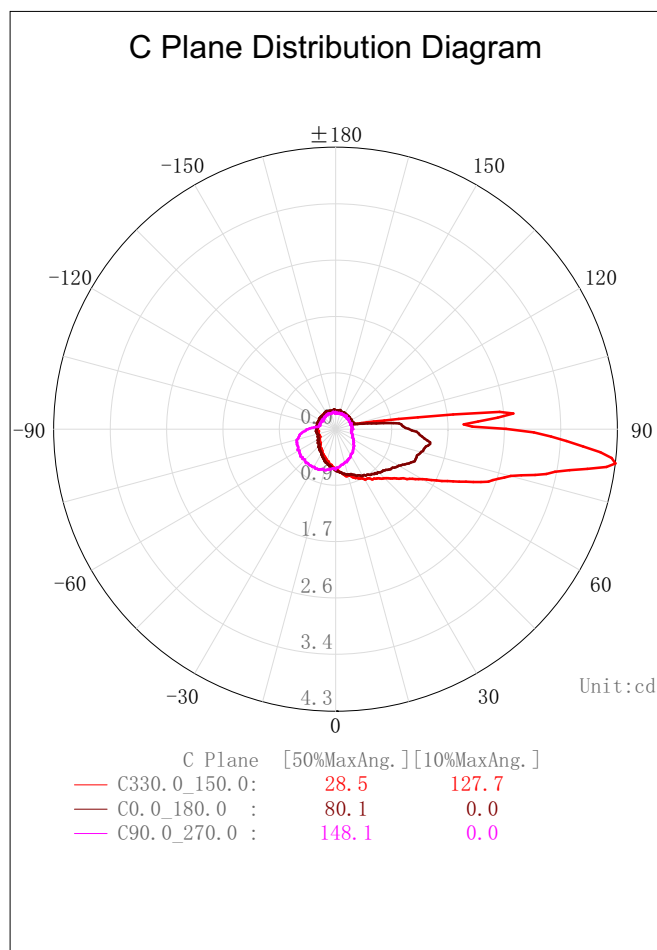




Plane ISO-Illuminance Diagram

Lum. Name: FLURI C RANURA REC 06. AA96. 11_2. __	Lum. Catalog: Wall Light	Test ID:
Lamp Name:	Lamp Catalog: SMT	Test Lab:
Manufacture: IDEA ILUMINACIÓN S.A.	Test Machine: GON-2000	Test Date: 2021/07/09

Plane ISO-Illuminance Curve

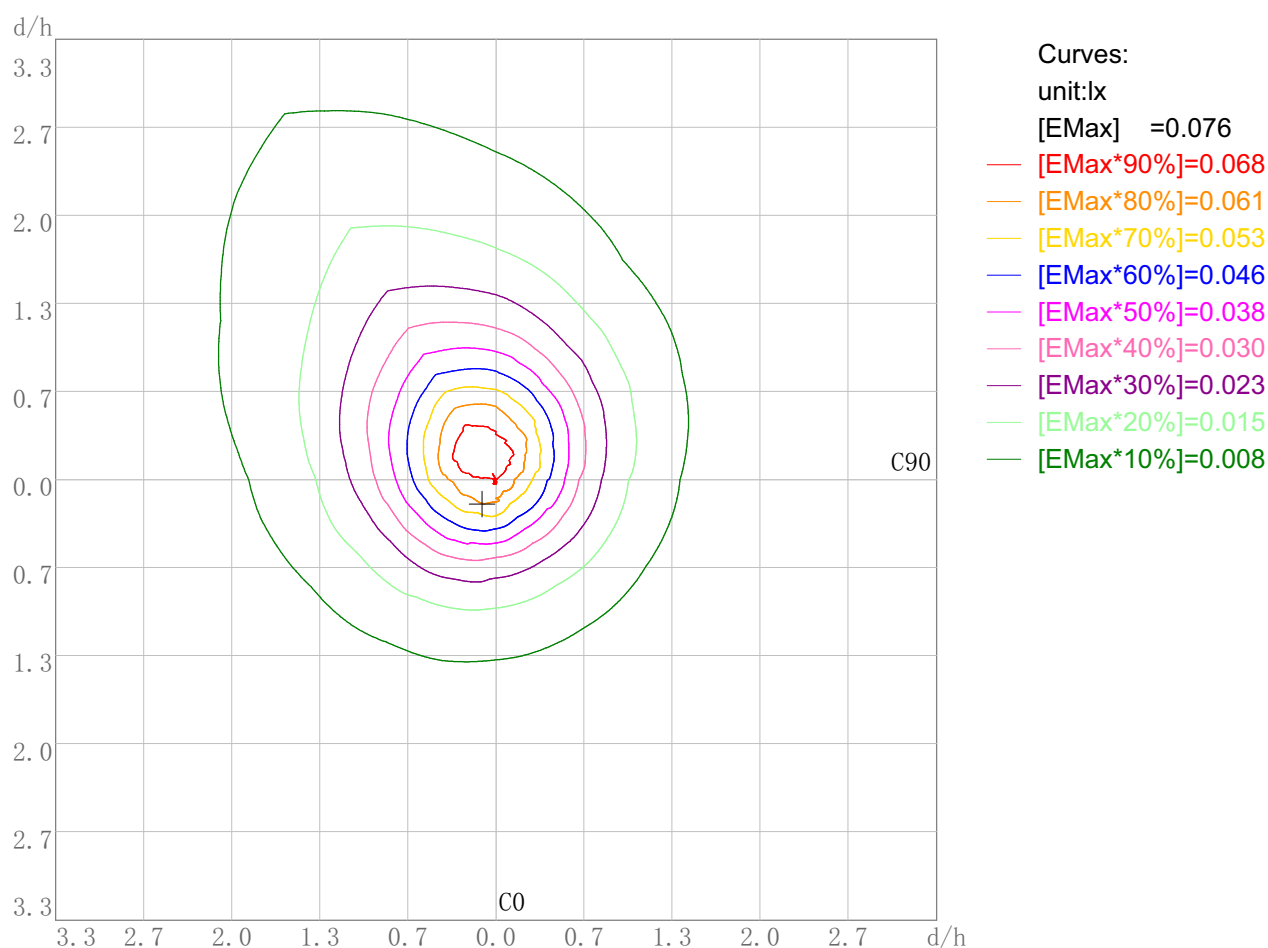

Working Plane Luminaire Mounting Height(m): 3.00

Working Plane Maximum Illuminance(lx): 0.08

Working Plane Maximum Illuminance Position(d/h):H-0.1 V0.2



Illuminance-Distance Diagram

Lum. Name: FLURI C RANURA REC 06.AA96.11_2.__	Lum. Catalog: Wall Light	Test ID:
Lamp Name:	Lamp Catalog: SMT	Test Lab:
Manufacture: IDEA ILUMINACIÓN S.A.	Test Machine: GON-2000	Test Date: 2021/07/09

Illuminance-Distance Curve

